





Against 7.62x39, 5.56x45, 7.62x51, M193, & M80 Ball

ARMORED MERCEDES-BENZ G63 AMG WAGON

ALPINE ARMORING INC. alpineco.com

GENERAL SPECIFICATIONS

MAKE: Mercedes-Benz

MODEL: G63 AMG

VIN: WDCYC7HJ8LX335920

YEAR: 2020

ENGINE: 4.0L BiTurbo V8 Gasoline

POWER: 577 HP - 598 lb-ft of torque

TRANSMISSION: 9- Speed Automatic

COLOR: Obsidian Black Metallic

INTERIOR: Platinum White/Black Leather

SEATING: 2 + 3

FINAL WEIGHT: 7,830 LBS. (3,551 KG.) Armored

> HEIGHT: 77 in.

(196 cm)

WIDTH: 86 in. (218 cm)

LENGTH: 192 in. (487 cm)

WHEELBASE: 113 in. (289 cm)





Firewall

Ballistic steel firewall provides protection up front.

4-1

Roof

Roof is lined with ballistic steel at angle.

4-5





Floor

Floor is lined with ballistic steel to protect against mines and grenade blasts.

4-2

Doors

All doors are made from ballistic steel.

4-6





Battery Protection

Entire battery is enclosed in a fully ballistic steel casing.

4-3

Rear Door

OEM Rear door with Ballistic steel and rear ballistic glass installed.

4-7





Overlaps

All doors and windows feature ballistic steel overlaps to keep shrapnel from angle shots from entering the cabin.

4-4

Wheel Wells

Front and rear wheel wells are lined with ballistic steel.

4-8





* Tel:+1.703.471.0002 * Fax:+1.703.471.0202 * www.alpineco.com * sales@alpineco.com *



Glass Thickness

Minimum 40 mm thick glass/polycarbonate composite transparent armor.

4-1



Anti-Spall Layer

Inner-most anti-spall layer prevents glass and bullet fragments from penetrating into passenger cabin area.

4-2



Multi-Hit Protection


All windows are capable of sustaining multiple hits while providing protection to passengers.

4-3



Anchored Windows

All windows are anchored for additional protection from explosions.

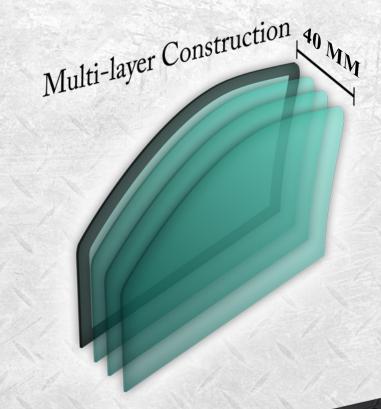





P.A./Multi-Siren System

Located on the center console. The multi-siren features standard siren tones, volume adjustment, and a public address system.

5-1

Undercarriage Protection

Ballistic steel to protect all undercarriage of vehicle.





Power Window

The front window is powered and lower approximately 5-6 inches.

5-3

Fuel Tank Protection

Fuel tank is protected by a ballistic steel box. Protects from two simultaneous grenades.





Strobe Lights

Two red/blue strobe lights are mounted in the front grill. Controlled using the P.A./siren control unit in the center console.

5-5

Reinforced Bull Bar

A heavy-duty bull bar is installed directly to the frame of the vehicle.





Rear Armored Door

The rear door is armored and maintaining the OEM look

5-7

Tailpipe Protection

The tailpipe features a special mesh that prevents the tailpipe from being sabotaged.





















































	S	LEVELS					BULLETS			protects you better"		
WEAPONS	ТҮРЕ	CALIBER (mm)	CLASS	STANAG	UL	ALPINE	NIJ	CEN	MASS (g)	MATERIAL	VELOCITY	NUMBER OF SHOTS
	.38 Special	9 x 19	Handgun	-	1	A1	I.II.IIA	-	8.00	ΓCC1	358 M/S	5
	.357 Magnum	9 x 33	Handgun	-	2	A2	I.IIA	B1 & B3	10.20	JSP	430 M/S	5
	.44 Magnum	11 x 33	Handgun	-	3	A3	IIIA	B4	15.60	LWC	440 M/S	<u>.</u>
1-70	MP5	9 x 19	SMG	-	6	A4	IIIA	B2	8.00	lCO	427 M/S	, —
	Shotgun	12 Gauge	Shotgun	-	3 & 4	Aa	IIIA	SG2	28.30	SLUG	503 M/S	3
	Tokarev	7.62 x 25	Handgun	-	-	A5	IIIA	-	5.50	rcsı	488 M/s	5
	Kalashnikov (AK-47)	7.62 x 39	Assault Rifle	-	-	A6	III	B5	9.70	SCCI	732 M/s	5
-	Kalashnikov (AK - 47 Military)	7.62 x 39 API BZ	Assault Rifle	1	_	A7	_	B5+	11.70	2CC1	774 M/s	
	M16/AR-15	5.56 x 45 NATO SS109 5.56 x 45 NATO Ball	Assault Rifle	1	7	A8	IV	B5	4.00	FCC1 2CC1	900 M/s 833 M/s	3
-	Winchester .308	7.62 x 51	Rifle	1	7	A9	III	B6	10.90	rcci	810 M/S	5
	Remington 700 SPS	7/2 × 63 AP (30-06)	High-Power Rifle	111	5 & 8	A10	IV	В7-	10.80 8.40	AP	869 M/s 930 M/s	-
	Dragunov	7.62 x 54R B32 API	Sniper Rifle	III	-	A11	IV+	B7+	10.04	2CC1	854 M/S	
	.50 Cal	12.7 x 99	High-Power Rifle	IV	10	A12	-	-	45.00	CI	908 M/S	



UL Underwriters Laboratory, 752

NIJ National Institute of Justice, 0108.01

CEN European Standard

STANAG ... NATO's Standard (STANAG 4569)

ALPINE Alpine Armoring's Certified Standard

LCCJ Lead Core Copper Jacket

JSP Jacketed Soft Point LWC Lead Wad Cutter

LCSJ Lead Core Steel Jacket SCCJ Steel Core Copper Jacket

AP Armor Piercing

SG Shotgun

Shots (5) 11.4 cm Square Pattern (Corners & Center)

Shots (3) 11.4 cm Triangular Pattern Velocity Minimum Measured Velocity

NIJ Rating .. Levels I, II, IIA, & IIIA (based on 1 of 2 required calibers of ballistic threat)







WARRANTY

ARMORED MERCEDES-BENZ G63 AMG

This vehicle, as proposed to the client in this quote, would be under Alpine Armoring's premium warranty covering both the OEM and the entire conversion parts including all armored parts and labor as well as all added accessories for one full year, effective the day of sale. Additional warranty for longer period is available upon request.

Alpine Armoring Inc. hereby honors this warranty in the United States and around the world against any and all related manufacturer's defects, including parts & labor.

MANAGEMENT AUTHORIZED ALPINE ARMORING INC. CHANTILLY, VIRGINIA, USA

DATE ISSUED

